




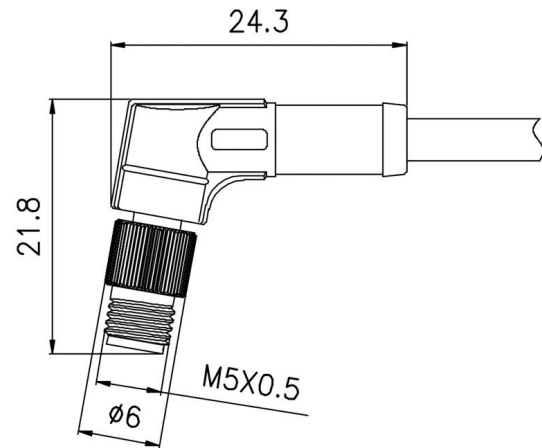

- M5 male molded cable ,R/A.
- Description:M5 male molded 90degree cable with free end.

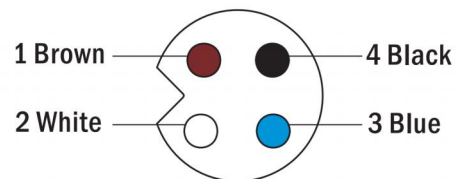

## Assembly Instruction

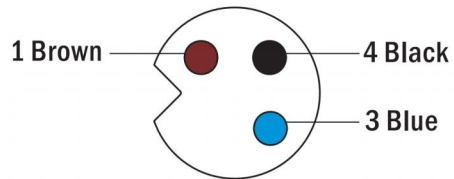

## Technical Data

Pin No.	3	4
Coding	A	A
Pin for reference		
Type	Molded	
Rated current	1A	1A
Rated voltage	60V	60V
Operating Temperature	-25 C~80 C	
Degree of protection	IP67/IP68	
Connector locking system	Solder	
Mechanical operation	>500 mating cycles	
Contact resistance	≤3mΩ	
Material of connector	CuZn,TPU	
Contact plating	Au(gold plating)	
Cable size	0.14mm <sup>2</sup>	0.14mm <sup>2</sup>

## Order Information

Part No.	Model No.
<b>M5-A-MR-</b> <div style="display: inline-block; width: 50px; height: 20px; border: 1px solid black; margin: 0 5px;"></div> <div style="display: inline-block; width: 50px; height: 20px; border: 1px solid black; margin: 0 5px;"></div> <div style="display: inline-block; width: 50px; height: 20px; border: 1px solid black; margin: 0 5px;"></div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="text-align: center;">Pin No.</div> <div style="text-align: center;">Length</div> <div style="text-align: center;">Cable materials</div> </div>	<b>RG051001</b>

Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.