


- M12 male/RJ45 adapter, straight
- Description: M12 male/RJ45 straight plastic adapter, A/D coded

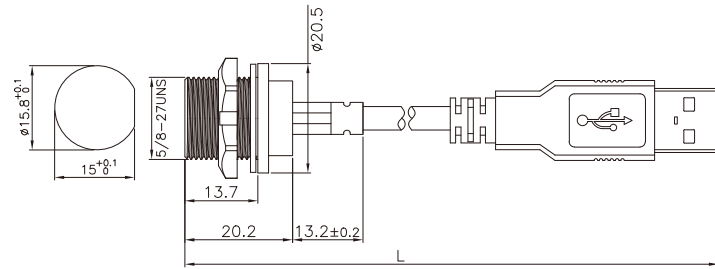

Assembly Instruction

Technical Data

Cable specification	0.15m m~0.2m m/26-24 AWG	
Diameter range	5.5mm ~7mm	
Contact diameter x number	9(USB3.0)	4(USB2.0)
Rated Current (A)	1.5(A)	
Contact resistance	<math><30\text{m}\Omega</math>	
Withstanding Voltage (AC.V) 1 minute	1000v	
Insulation resistance	>500MQ	
Protection level	IP67	
Durability	>500 times	
Working temperature	-40 C ~80 C	
Connecting mode	Quickly bayonet connect / Screw lock way	
Housing, the insulating parts	High-performance engineering plastics	
Hardware	Zinc Alloy (pearl hard chrome)	
Copper needles	Copper Shell	
Waterproof circle	Silica gel	
Flammability rating	UL94-V0	

Order Information

■ Part No.	■ Model No.
MIC-PMS-F- <input type="text"/> -U2-AM Length	RG-MC104

Remark: Contact us any time if you have custom requirements.