



M5

M9

M12

M16

M18

M23

7/8"

Value

RJ45


USB

D-SUB

RD24

RD30

- M5 female molded cable ,straight.
- Description:M5 female molded straight cable with free end.

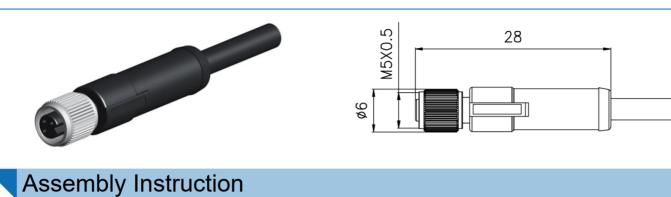



Technical Data

Pin No.	3	4	
Coding	A	А	
Pin for reference		$2 \bigcirc 0 \bigcirc 3$ 1 \bigcirc 0 4	
Туре	Mol	Molded	
Rated current	1A	1A	
Rated voltage	60V	60V	
Operating Temperature	-25℃~	-25 °C ~80 °C	
Degree of protection	IP67/	IP67/IP68	
Connector locking system	Sol	Solder	
Mechanical operation	>500 mati	>500 mating cycles	
Contact resistance	≤3mΩ		
Material of connector	CuZn,TPU		
Contact plating	Au(gold	Au(gold plating)	
Cable size	0.14mm²	0.14mm²	

Order Information



Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.