



- M8 male to female molded cable
- Description: M8 male straight to female 90degree molded cable ,A/B/D coded

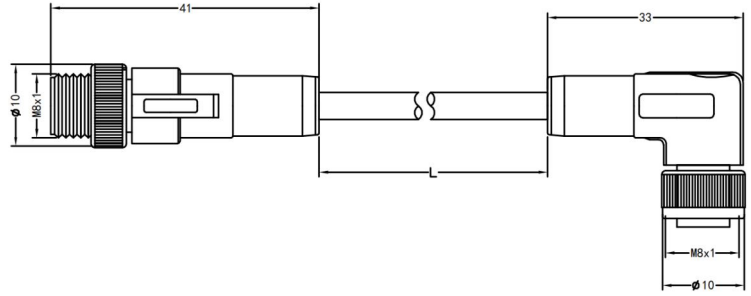

### Assembly Instruction

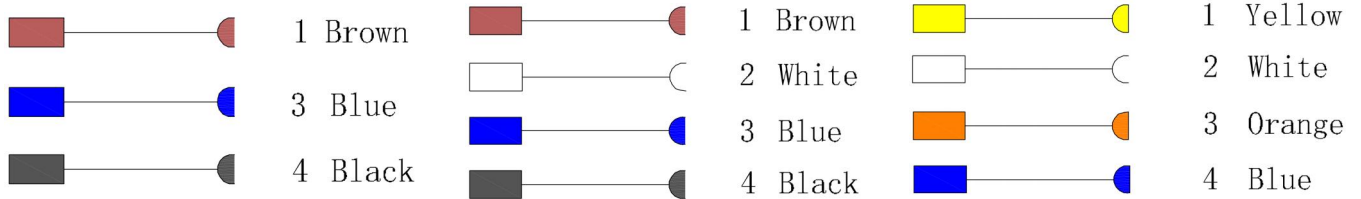

### Technical Data

Pin No.	3	4	4	5	6	8
Coding	A	A	D	B	A	A
Pin for reference						
Type	Molded					
Rated current	3A	3A	4A	3A	1.5A	1.5A
Rated voltage	60V	60V	60V	30V	30V	30V
Operating Temperature	-25℃~85℃					
Degree of protection	IP67/IP68					
Connector locking system	Solder					
Mechanical operation	>500 mating cycles					
Contact resistance	≤10mΩ					
Material of connector	CuZn,TPU or PVC					
Contact plating	Au(gold plating)					
Cable size	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.14mm <sup>2</sup>	0.14mm <sup>2</sup>

### Order Information

<b>Part No.</b> <b>M8-</b> <input type="text"/> <b>-MS-</b> <input type="text"/> <b>-</b> <input type="text"/> <b>-</b> <input type="text"/> <b>-FR</b> Coded      Pin No.      Length      Cable materials	<b>Model No.</b> <b>RG081063</b>
---	-------------------------------------

Remark: Contact us any time if you have custom requirements.