



- M8 female to female molded cable, shielded
- Description: M8 female straight to female 90degree shielded molded cable ,A/B/D coded

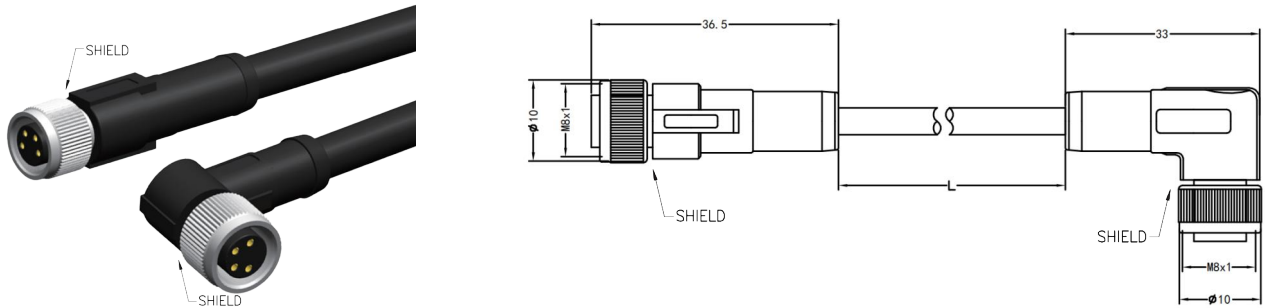

Assembly Instruction

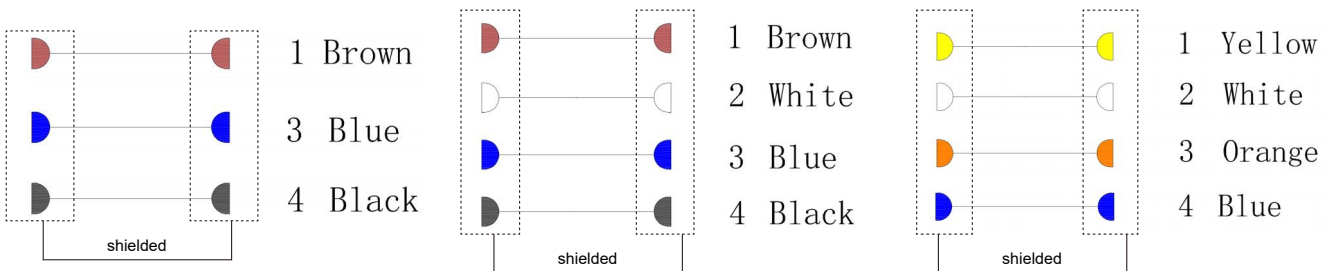

Technical Data

| Pin No. | 3 | 4 | 4 | 5 | 6 | 8 |
|--------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Coding | A | A | D | B | A | A |
| Pin for reference | | | | | | |
| Type | Molded | | | | | |
| Rated current | 3A | 3A | 4A | 3A | 1.5A | 1.5A |
| Rated voltage | 60V | 60V | 60V | 30V | 30V | 30V |
| Operating Temperature | -25 C ~85 C | | | | | |
| Degree of protection | IP67/IP68 | | | | | |
| Connector locking system | Solder | | | | | |
| Mechanical operation | >500 mating cycles | | | | | |
| Contact resistance | ≤10mΩ | | | | | |
| Material of connector | CuZn, TPU or PVC | | | | | |
| Contact plating | Au(gold plating) | | | | | |
| Cable size | 0.25mm ² | 0.25mm ² | 0.25mm ² | 0.25mm ² | 0.14mm ² | 0.14mm ² |

Order Information

| Part No. | Model No. |
|--|-----------|
| M8- <input type="text"/> -FS- <input type="text"/> - <input type="text"/> - <input type="text"/> -FR-SH Coded Pin No. Length Cable materials | RG081078 |

Remark: Shielded wire contact the metal shell .Contact us any time if you have custom requirements.