




- RG1310 防水连接器
- 描述:RG1310 组装防水连接器与RG1311/RG1312相配

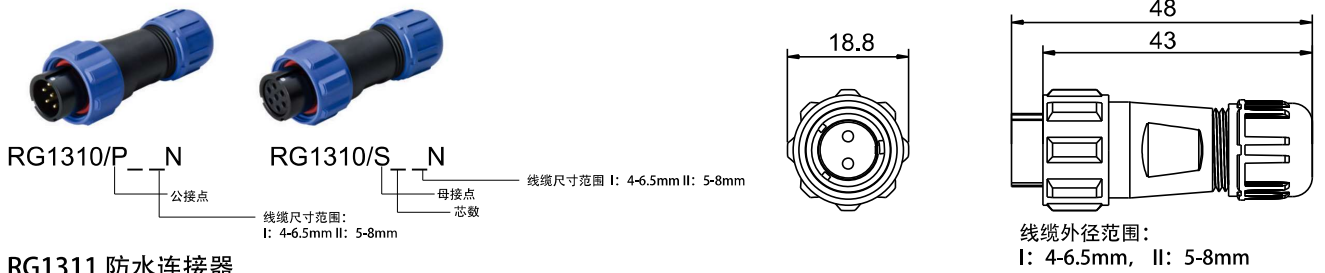

- RG1311 防水连接器
- 描述:RG1311 组装防水连接器与RG1310相配

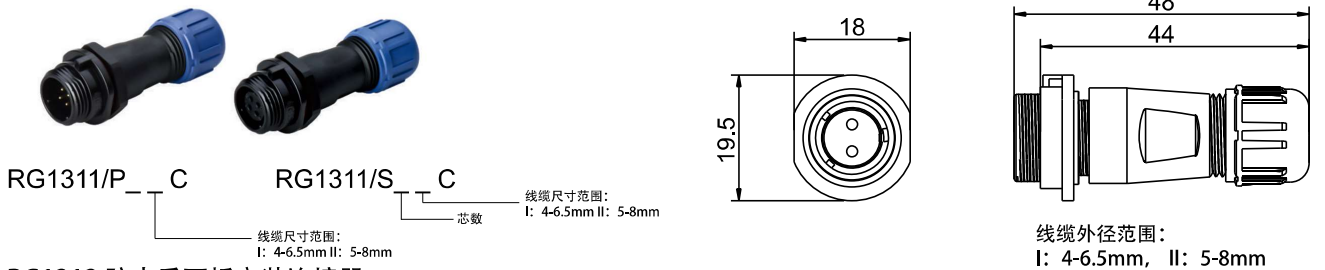

- RG1312 防水后面板安装连接器
- 描述:RG1312 防水后面板安装连接器与RG1310相配

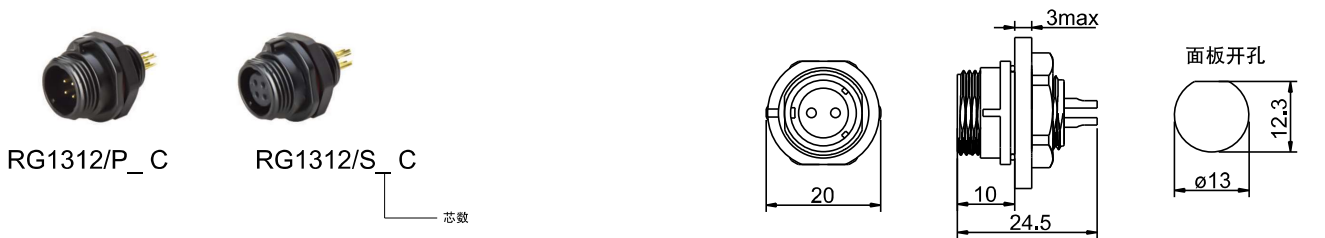

## 技术参数

针数	2	3	4	5	6	7	9
公头接点视图							
额定电流 (A)	13	13	5	5	5	5	3
触点直径(mm)	1.6	1.6	1	1	1	1	0.7
额定电压(AC.V)	250	250	200	180	125	125	125
测试电压(AC.V) 1 min	1500	1500	1500	1000	1000	1000	1000
接触电阻 (mΩ)	2.5	2.5	5	5	5	5	10
线径(mm <sup>2</sup> /AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20

## 订单信息

针数	订货号	订货号	订货号
2	RG1310P-2P/RG1310S-2P	RG1311P-2P/RG1311S-2P	RG1312P-2P/RG1312S-2P
3	RG1310P-3P/RG1310S-3P	RG1311P-3P/RG1311S-3P	RG1312P-3P/RG1312S-3P
4	RG1310P-4P/RG1310S-4P	RG1311P-4P/RG1311S-4P	RG1312P-4P/RG1312S-4P
5	RG1310P-5P/RG1310S-5P	RG1311P-5P/RG1311S-5P	RG1312P-5P/RG1312S-5P
6	RG1310P-6P/RG1310S-6P	RG1311P-6P/RG1311S-6P	RG1312P-6P/RG1312S-6P
7	RG1310P-7P/RG1310S-7P	RG1311P-7P/RG1311S-7P	RG1312P-7P/RG1312S-7P
9	RG1310P-9P/RG1310S-9P	RG1311P-9P/RG1311S-9P	RG1312P-9P/RG1312S-9P

温馨提示:如果您有定制要求, 请随时联系我们。